

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
**Image Problem Mailbox.**





Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 884 863 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
16.12.1998 Bulletin 1998/51

(51) Int. Cl.<sup>6</sup>: H04B 7/26, H04Q 7/30

(21) Application number: 98201966.3

(22) Date of filing: 12.06.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(71) Applicant:  
Radio Communication Systems Limited  
Amagasaki-shi, Hyogo 661-0035 (JP)

(72) Inventor: Niki, Yoshio  
Nagoya-shi, Aichi 464-0021 (JP)

(30) Priority: 12.06.1997 JP 191755/97  
08.07.1997 JP 218900/97  
25.11.1997 JP 363041/97  
25.02.1998 JP 87883/98  
14.03.1998 JP 106889/98

(74) Representative:  
Gee, Steven William  
1 South Lynn Gardens,  
London Road  
Shipston on Stour, Warwickshire CV36 4ER  
(GB)

(54) Distributed antenna for personal communication system

(57) A Distributed Antenna for use in a Digital Mobile Telephone system includes a coaxial cable or cables to communicate RF signals to and from a base station in which at least one set of transmitter and receiver is transmitting and receiving said RF signals, two mutually isolated amplifiers, two dividers, at least one combiner, and at least one built-in antenna to communicate with a subscriber unit(s). A printed circuit board is provided to assemble said built-in antenna on one side of said printed circuit board, and to assemble other electronic circuits on the other side of said printed

circuit board, and said printed circuit board is housed in a plastic case. Said distributed antenna provides a small sized and very cheap antenna solution to spread RF signals to serve a wider serving area. Moreover, if at least a set of transmitter and receiver is included in said combiner to communicate said RF signals between said base station and said subscriber units, tremendously higher gain and conversions in the control protocol and/or RF frequencies can be realized.

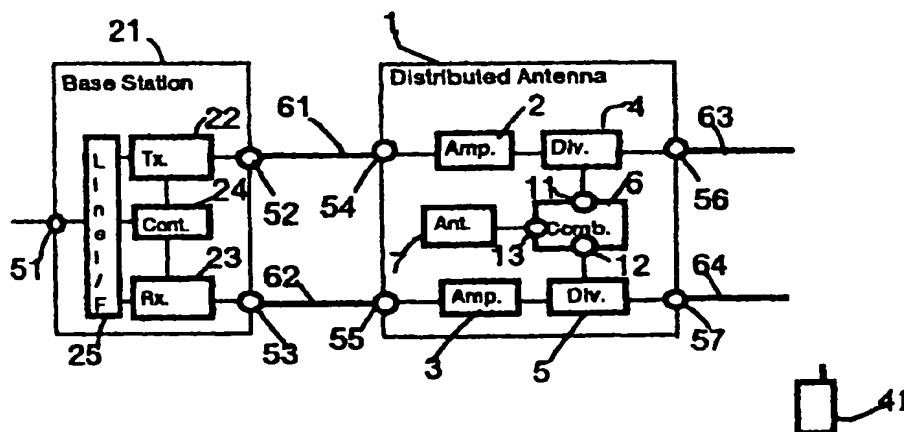


FIG. 1

EP 0 884 863 A2

## Description

This invention relates to mobile wireless communications systems and generally to the field of antenna facilities which include an amplification circuit to compensate the losses generated by connecting the antenna facilities to the base station through coaxial cables, and more specifically, relates to the configurations of the antenna facilities including the Printed Circuit Board on which the antenna element and/or electronic circuits are assembled, and the configurations of the combiner to connect to said antenna element.

This distributed antenna is aimed at enhancing the serving area of a PHS (Personal Handy Phone System) or PCS (Personal Communication System) which serving area is sometimes limited by its small power output and obstructions such as walls and/or ceilings that block RF signals, and to distribute the RF signals for ensuring smallness in size and economical solutions.

It is known to provide a Duplex RF repeater having an amplifier in various configurations for receiving, amplifying, and re-transmitting down-link signals from a base station into an obstructed area, and also for receiving up-link signals from subscriber units in the obstructed area, amplifying them and re-transmitting the amplified signals to the base station. One known design has an up-link amplifier and a down-link amplifier, and an isolation means between them, to receive both up-link and down-link signals from a base station and amplify these signals, and re-transmit these signals through divider means to downstream antenna means, and RF cable means communicating with the next stage of the duplex RF repeater. A known duplex RF repeater is shown in Fig.10.

Problems may arise with the above described duplex RF repeater when applied for installation in the actual personal communication systems. Since the downstream antenna must be installed separately from the main-box of the duplex RF repeater, connectors and connection cables are needed, which increases the total cost of the systems.

## SUMMARY OF THE INVENTION

The present invention provides a new and improved apparatus for amplifying the RF signals to/from a base station to enhance the coverage of the serving area where the obstructions otherwise reduce the RF signal levels, and distributing one or more RF carriers assigned for the personal communications system into a plurality of the micro-cell serving areas to achieve economical installation cost.

In brief summary, antenna means and other electronic circuits are assembled on a printed circuit board and said printed circuit board is covered by a plastic case and partially in a metal shielding case. Combiner means can be provided to adopt a built-in common

antenna element.

In one embodiment, antenna means and other electronic circuits are assembled on a printed circuit board, and said printed circuit board is housed in a plastic case and partially covered by a metal shield.

In a second embodiment, the combiner means is constructed as a circulator, divider, directional coupler, and/or electronic switch to connect a common antenna means to receive and re-transmit the RF signals to/from subscriber units within a serving area.

In a third embodiment, the combiner means includes a digital transceiver, to connect common antenna means by repeating the RF signals and converting the protocol and/or frequencies of said RF signals.

## BRIEF DESCRIPTION OF THE DRAWINGS

The invention is described particularly in the appended claims. The above and further advantages of the invention will be better understood by referring to the following detailed descriptions of illustrative embodiments taken in conjunction with the accompanying drawings, in which:

- FIG. 1 is a system block diagram including a distributed antenna constructed in accordance with the invention;
- FIG. 2 is another system block diagram including a distributed antenna constructed in accordance with the invention;
- FIG. 3 is yet another system block diagram including a distributed antenna constructed in accordance with the invention;
- FIG. 4 is a further system block diagram including a distributed antenna constructed in accordance with the invention;
- FIG. 5 is a block diagram of a distributed antenna constructed in accordance with the invention;
- FIG. 6 is another system block diagram including an antenna coupler, a distributed antenna, and a loop back tester constructed in accordance with the invention;
- FIG. 7 is a configuration of a distributed antenna constructed in accordance with the invention;
- FIG. 8 is another configuration of a distributed antenna constructed in accordance with the invention;
- FIG. 9 is yet another configuration of a distributed antenna constructed in accordance with the invention; and
- FIG. 10 is a block diagram of a prior art duplex RF repeater system.

# DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

With reference to FIG. 10, there is illustrated a prior art duplex RF repeater 1. In the Duplex RF Repeater 1, the down-link RF signals communicated to the terminal 54 are amplified by the down-link amplifier 2, and then said amplified RF signals are divided into two branches by the divider 4. Divider 4 is connected by one branch to the divider 6, and the other branch of the divider 4 is connected to the terminal 56. On the other hand, the up-link RF signals communicated to the terminal 57 are combined by the divider 5 with the RF signals communicated from the divider 6, and then amplified by the up-link amplifier 3 and then communicated to the terminal 55. At the terminal 10 of the divider 6, a downstream antenna can be connected to serve subscriber units within the serving area. This scheme is not always cost effective because the downstream antenna must be connected separately through a coaxial cable, and as a result, the dimensions of the duplex RF repeater are of large size.

With reference to FIG. 1, the RF signals from the transmitter 22 of the base station 21 are communicated to the terminal 54 of the distributed antenna 1 through the terminal 52 and the coaxial cable 61. The receiver 23 of the base station 21 is in communication with the terminal 55 of said distributed antenna 1 through the terminal 53 and the coaxial cable 62. Said transmitter 22 and receiver 23 of the base station 21 are controlled by the controller 24, and are in communication with the telephone lines through the interface unit 25 and terminal 51. In said distributed antenna 1, the down-link amplifier 2 amplifies the down-link RF signals, and these signals are communicated to the divider 4 and then one of the divided branches of the divider 4 is in communication with the built-in common antenna element 7 through combiner 6, and these signals radiated from said antenna element 7. The other divided branch of the divider 4 is connected to the terminal 56.

Since the amplifier gain of the amplifier 2 is adjusted to match the total loss of the coaxial cable 61 and divider 4 and combiner 6, not only the radiated power from said antenna element 7 but also the output power from the terminal 56 to the next stage of said distributed antenna are almost the same magnitude as the power output from the transmitter 22 of the base station 21.

On the other hand, the RF signals transmitted from the subscriber unit 41 is received by said antenna element 7 first, and communicated to the up-link amplifier 3 through the terminal 13 and combiner 6 and divider 5. These amplified signals are further communicated to the receiver 23 of the base station 21 through the coaxial cable 62 and terminal 53. The other branch of the divider 5 is connected to the terminal 57 to connect to the next stage of said distributed antenna. Since the amplifier 3 compensates the losses caused by the coax-

ial cable 62, these signals transmitted from the subscriber unit 41 are received by the receiver 23 with high sensitivity.

With reference to FIG. 2, the distributed antenna 1 constructed in accordance with this invention is in communication with the terminal 52 of the base station 21 through the terminal 54 and the coaxial cable 61. Said terminal 52 is further in communication with the receiver 23 and transmitter 22 of said base station 21 through the antenna switch 26. Said transmitter 22 and receiver 23 of said base station 21 are controlled by the controller 24, and in communication with the telephone lines through the interface unit 25 and terminal 51. In said distributed antenna 1, the divider 15 divides said RF signals and communicates with the down-link amplifier 2 and up-link amplifier 3. The down-link amplifier 2 amplifies the down-link RF signals, and these signals are communicated to the divider 4 and then one of the divided branches of the divider 4 is in communication with the built-in common antenna element 7 through combiner 6, and said RF signals are radiated from said antenna element 7. The other divided branch of the divider 4 is in communication with the terminal 56 through the divider 16 to connect to the coaxial cable 63. Since the amplifier gain of the amplifier 2 is adjusted to match with the total loss of the coaxial cable 61, dividers 15 and 4, and combiner 6, not only the radiated power from said antenna element 7 but also the output power from the terminal 56 to the next stage of said distributed antenna are almost the same magnitude as the power output of the transmitter 22 of the said base station 21.

On the other hand, the RF signals transmitted from the subscriber unit 41 are received by said antenna element 7 first, and communicated to the up-link amplifier 3 through the terminal 13 and combiner 6 and divider 5. These amplified signals are further communicated to the receiver 23 of said base station 21 through the divider 15, terminal 54, coaxial cable 61, terminal 52, and antenna switch 26. The other branch of the divider 5 is in communication with the terminal 56 through divider 16 to connect to the next stage of said distributed antenna. Since the amplifier 3 compensates the losses caused by the divider 15 and coaxial cable 61, said RF signals transmitted from the subscriber unit 41 are received by the receiver 23 with high sensitivity.

With reference to FIG. 3, the distributed antenna 71 constructed in accordance with this invention is in communication with the transmitter 22 of the base station 21 through a coaxial cable 61 and the terminal 52, and to the receiver 23 of the base station 21 through a coaxial cable 62 and the terminal 53. Said transmitter 22 and receiver 23 are controlled by the control unit 24 and connected to the telephone line through the telephone line interface unit 25 and the terminal 51.

Within said distributed antenna 71, the down-link RF signals are divided into two branches by the divider 4. One branch of said divider 4 is in communication with

the antenna switch 77 in the combiner 6 through the terminal 11, and switched to the receiver 72. Said receiver 72 (in combination with the base band IC 75) converts said RF signals into base band signals and said transmitter 73 (in combination with the base band IC 75) modulates them into new RF signals by adapting said base band signals between said receiver 72 and said transmitter 73 in the TDMA (Time Division Multiple Access) repeater mode or CDMA (Code Division Multiple Access) repeater mode through the base band IC 75. The modulated RF signals are further communicated to the built-in antenna 7 through the built-in combiner 78 and terminal 13, and radiated toward a subscriber unit 41. RF signals from the other branch of said divider 4 are amplified by the amplifier 2 and communicated to the next stage of said distributed antenna 1 through a terminal 56 and a coaxial cable 63.

On the other hand, RF signals from a subscriber unit 41 are received by said built-in antenna 7, and communicated to the antenna switch 77 through a terminal 13 and a built-in combiner 78, and switched to the receiver 72, and then said receiver 72 (in combination with the base band IC 75) converts said RF signals into base band signals and transmitter 73 (in combination with the base band IC 75) modulates them into other new RF signals by adapting said base band signals between said receiver 72 and said transmitter 73 in the TDMA repeater mode or CDMA repeater mode through the base band IC 75. The modulated RF signals are communicated to the divider 5 through the antenna switch 79 and terminal 12, and further communicated to the receiver 23 of the base station 21 through the terminal 55, coaxial cable 62, and terminal 53. The up-link amplifier 3 amplifies the RF signals from the terminal 57, and communicates with the other branch of the divider 5.

In the above, the synthesizer 74 supplies a local RF signal to the receiver 72 and transmitter 73, the controller 76 controls the base band IC 75, transmitter 73, and antenna switches 77 and 79. By these configurations, the distance between distributed antenna can be extended tremendously.

With reference to FIG. 4, the antenna coupler 81 constructed in accordance with this invention is in communication with the external base station 42 by way of the antenna 82. The down-link RF signals from said base station 42 are received by the antenna 82 and communicated to and amplified by the down-link amplifier 84, and communicated to the distributed antenna 71 at the terminal 54 through the terminal 52 and coaxial cable 61, and transmitted toward a subscriber unit 41 as described in FIG. 3 above.

On the other hand, the up-link RF signals at the terminal 55, which are transmitted from a subscriber unit 41 and amplified by said distributed antenna 1 as described above in relation to FIG. 3, are communicated to and amplified by the up-link amplifier 85 through the coaxial cable 62 and terminal 53, and said

amplified up-link RF signals are communicated to said base station 42 through the combiner 86 and antenna 82.

With reference to FIG. 5, another type of distributed antenna 71 constructed in accordance with this invention includes another type of combiner 6, in which the first transceiver 91b and the second transceiver 91a are provided, and interconnected by a cascade connection. Within said distributed antenna 71, the RF signals communicated to the terminal 54 are divided by the divider 15 into the down-link RF signals and up-link RF signals. Said down-link RF signals are divided by the divider 4 into two branches, and one branch of said divider 4 is in communication with the receiver 72b in the combiner 6 through the terminal 11, and said receiver 72b converts said RF signals into the base band signals and the transmitter 73a modulates them into other RF signals by adapting said base band signals in the FDMA (Frequency Division Multiple Access) or Cascade Connection repeater mode between said receiver 72b and transmitter 73a through the base band IC 75b and 75a. Said modulated RF signals are further communicated to the built-in antenna 7 through the built-in combiner 78 and terminal 13, and radiated toward a subscriber unit 41 (not shown in Fig.5). Said RF signals from the other branch of said divider 4 are amplified by the amplifier 2 and communicated to the next stage of said distributed antenna 1 through a terminal 56.

On the other hand, RF signals from a subscriber unit 41 (not shown in Fig.5) are received by said built-in antenna 7, and communicated to the receiver 72a through a terminal 13 and a built-in combiner 78, and said receiver 72a converts said RF signals into base band signals, and the transmitter 73a modulates said base band signals into other RF signals by adapting said base band signals in the FDMA or Cascade connection repeater mode between said receiver 72a and said transmitter 73b through the base band IC 75a and 75b, and communicated to one of the branches of the divider 5 through the terminal 12, and communicated toward the terminal 54. The up-link amplifier amplifies the RF signals from the terminal 54, and communicated to the other branch of the divider 5.

With reference to FIG. 6, another type of antenna coupler 81, distributed antenna 71a, and a loop-back tee 31 constructed in accordance with this invention are depicted. Said distributed antenna 71a is in communication with said antenna coupler 81 at the terminal 54a through a coaxial cable 61, and said loop-back tee 31 is further in communication with said distributed antenna 71a at the terminal 58 through a coaxial cable 63.

At the antenna coupler 81, a built-in antenna 82 receives the down-link RF signals transmitted from a base station, and fed to the receiver 88 through antenna switches 83 and 87. Said receiver 88 (in combination with the base band IC 91) converts said RF signals into base band signals, and said base band signals are

communicated to the transmitter 89 through the base band IC 91 and controller 92, and modulated into new down-link RF signals, and transmitted towards the distributed antenna 71a through antenna switches 87 and 83, and the coaxial cable 61.

At the distributed antenna 71a, a divider 78a feeds said down-link RF signals transmitted from said antenna coupler 81 to the receiver 72a through antenna switches 79a and 77a. Said receiver 72a (in combination with the base band IC 75a) converts said RF signals into base band signals, and said base band signals are communicated to the transmitter 73a through the base band IC 75a and controller 76a, and said base band signals are modulated into new down-link RF signals, and re-transmitted towards the subscriber unit 41 through antenna switches 77a and 79a, and the built-in antenna 7a.

At the loop-back tester 31, the down-link RF signals from said antenna coupler 81 are fed to the receiver 32 through the coaxial cable 63, the attenuator 38 and the antenna switch 37 and converted into base band signals, and communicated to the base band IC 35 and controller 36. Said controller 36 is further detecting control signals included within said base band signals. If the loop-back test command is included within said base band signals, said controller 36 sends back a loop-back answering command to said transmitter 33. Said transmitter 33 sends back said command towards the base station through said antenna switch 37, attenuator 38, coaxial cable 63, and the distributed antenna 71a. If the loss of the attenuator 38 is adjusted within limits, said antenna coupler 81 and said distributed antenna 71a can be checked including gains and functions. The synthesizers 90, 74a, and 34 are generating local RF signals and feed said RF signals into transmitters 89, 73a, and 33, and receivers 88, 72a, and 32.

On the other hand, the up-link RF signals transmitted from a subscriber unit 41 are received by the built-in antenna 7a. And said up-link RF signals are fed to the receiver 72a through antenna switches 79a and 77a, and converted into the base band signals, and communicated to the transmitter 73a through said base band IC 75a and controller 76a. Said transmitter 73a (in combination with the base band IC 75a) modulates said base band signals into new up-link RF signals and re-transmits said RF signals towards said antenna coupler 81 through antenna switches 77a and 79a, said divider 78a, and said coaxial cable 61. The receiver 88 of said antenna coupler 81 (in combination with the base band IC 91) converts said up-link RF signals into base band signals, and said base band signals are communicated to the transmitter 89 through the base band IC 91 and controller 92. Said transmitter 89 (in combination with the base band IC 91) modulates said base band signals into new up-link RF signals and re-transmits said RF signals towards said base station through antenna switches 87 and 83, and the built-in antenna 82.

If the coupling loss of the attenuator 38 is adjusted

within limits, said antenna coupler 81 and said distributed antenna 71a can be checked including gains and functions.

With reference to FIG. 7, a distributed antenna constructed in accordance with this invention is assembled on a single Printed Circuit Board 8, and housed within a plastic case 9. The terminals 54, 55, 56, and 57, the down-link amplifier 2 and up-link amplifier 3, the dividers 4 and 5, and the built-in combiner 6 are assembled on one side of said Printed Circuit Board 8. The built-in antenna 7 is assembled on the other side of said printed circuit board 8. Here, said combiner 6 is constructed as a circulator, and said built-in antenna is constructed with a monopole antenna 7. By the above construction, a small sized and very cheap omnidirectional distributed antenna can be realized.

With reference to FIG. 8, another type of distributed antenna 1 constructed in accordance with this invention is described, and said combiner 6 is constructed with a divider with 3dB loss, and said built-in antenna is constructed with a patch antenna with radiation element 7'. By the above constructions, a wall-mounted type directional distributed antenna can be realized.

With reference to FIG. 9, another type of distributed antenna 1 constructed in accordance with this invention is described, and said combiner 6 is constructed with a 0 degree or 180 degree hybrid coupler, and said built-in antenna 7 is constructed by two patch antennas 7a and 7b with radiation elements 7a' and 7b'. By the above constructions, a wall-mounted type directional distributed antenna can be realized. If a 0 degree hybrid coupler 6 is adopted, a single pole directional distributed antenna 1 can be realized. If a 180 degree hybrid coupler 6 is adopted, a two-pole directional distributed antenna 1 can be realized.

## Claims

1. A distributed antenna (7,71,71a) for use in a digital mobile communication system, the distributed antenna comprising:

- (1) at least one RF transmission means (61,62) to communicate the RF signals received from and transmitted to a base station;
- (2) two isolated amplifier means (2,3) to amplify the respective down-link RF signals and up-link RF signals transmitted to and received from said base station;
- (3) two divider means (4,5) which divide down-link RF signals and up-link RF signals into at least two branches;
- (4) two built-in antenna means (7a,7b) which are in communication separately with one of said branches of said divider means;
- (5) at least one RF transmission means (63,64) to communicate another divided branch of said divider means with the next stage of said dis-

tributed antenna;

(6) a printed circuit board (8) on which said built-in antenna and other electronic circuits are assembled; and

(7) a plastic case (9) and a partially shielding case to cover said Printed Circuit Board. 5

2. A distributed antenna (7,71,71a) for use in a digital mobile communication system, the distributed antenna comprising: 10

(1) at least one RF transmission means (61,62) to communicate the RF signals received from and transmitted to a base station;

(2) two isolated amplifier means (2,3) to amplify the respective down-link RF signals and up-link RF signals transmitted to and received from said base station; 15

(3) two divider means (4,5) which divide down-link RF signals and up-link RF signals into at least two branches; 20

(4) one common built-in antenna means (7) and combiner means (6) which are in communication with one of the branches of said divider means;

(5) at least one RF transmission means (63,64) to communicate another divided branch of said divider means with the next stage of said distributed antenna; 25

(6) a printed circuit board (8) on which said built-in antenna and other electronic circuits are assembled; and 30

(7) a plastic case (9) and a partially shielding case to cover said Printed Circuit Board. 35

3. A distributed antenna (7,71,71a) for use in a digital mobile communication system, the distributed antenna comprising:

(1) at least one RF transmission means (61,62) to communicate the RF signals received from and transmitted to a base station; 40

(2) combiner means (6), including at least one set of transmitter (73) and receiver (72), to convert said RF signals into base band signals and to modulate said base band signals into new RF signals by adapting said base band signals between said receiver and said transmitter to pass the RF signals to and from a divider means; 45

(3) antenna means (7) which is in communication with said combiner means; and 50

(4) at least one RF transmission means (63,64) to communicate another divided branch of said divider means with the next stage of said distributed antenna. 55

4. A distributed antenna as claimed in claim 3,

wherein said distributed antenna comprises:

(1) two isolated amplifier means (2,3) to amplify the respective down-link RF signals and up-link RF signals transmitted to and from a base station;

(2) a printed circuit board (8) on which said built-in antenna means and other electronic circuits are assembled; and

(3) a plastic case (9) and a partially shielding case to cover said printed circuit board.

5. An antenna coupler (81) to communicate said distributed antenna as claimed in claim 1, 2, or 3 with an external base station, wherein said antenna coupler comprises:

(1) antenna means (82) to transmit and receive said RF signals to and from said base station;

(2) two isolated amplifiers (84,85) to amplify said down-link and up-link RF signals; and

(3) at least one RF transmission means (61,62) to communicate with said distributed antenna.

6. An antenna coupler (81) to communicate said distributed antenna as claimed in claim 1, 2, or 3 with an external base station (42), wherein said antenna coupler comprises:

(1) antenna means (82) to transmit and receive said RF signals to and from said base station;

(2) combiner (86) and amplifier means (84,85), including at least one set of transmitter (89) and receiver (88), to convert said RF signals into base band signals and to modulate said base band signals into new RF signals by adapting said base band signals between said receiver and said transmitter to pass the RF signals to and from a divider means;

(3) at least one RF transmission means (61) to communicate with said distributed antenna.

7. A distributed antenna as claimed in claim 1, 2, or 3, wherein said distributed antenna includes frequency converting means (74,75) in between the carrier frequency band of said RF signals transmitted to and received from said base station and the carrier frequency band of said RF signals transmitted to and received from said subscriber units (41).

8. A loop-back tester (31) to test said distributed antenna (71a) as claimed in claim 1, 2, or 3, wherein said loop-back tester comprises:

(1) at least one RF transmission cable (63) to communicate with said distributed antenna; and

(2) at least one set of transmitter (33) and



receiver (32) to detect a loop-back test command and to transmit a loop-back answering command.

5

10

15

20

25

30

35

40

45

50

55

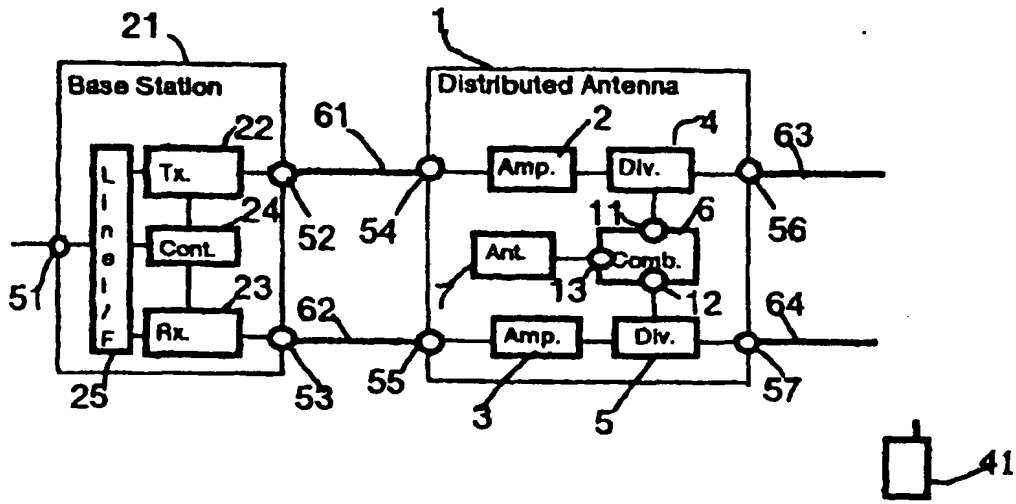


FIG. 1

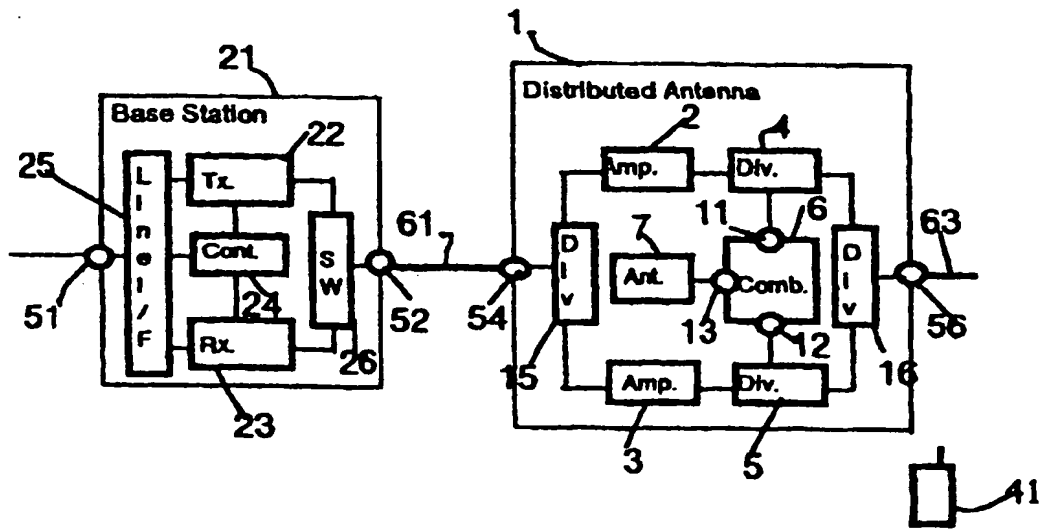


FIG. 2

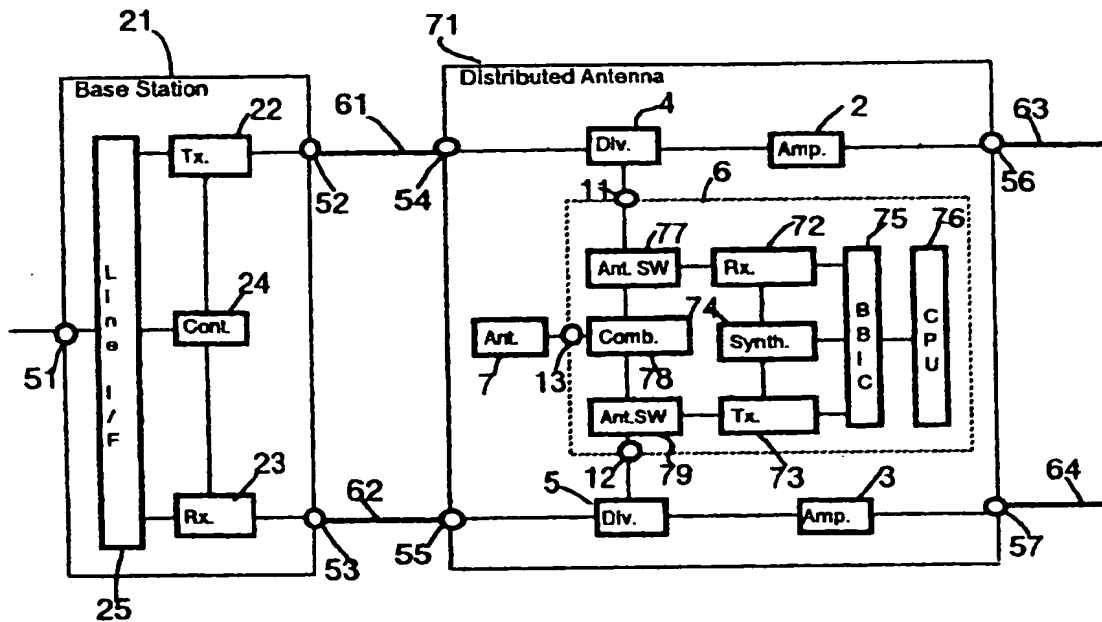


FIG. 3

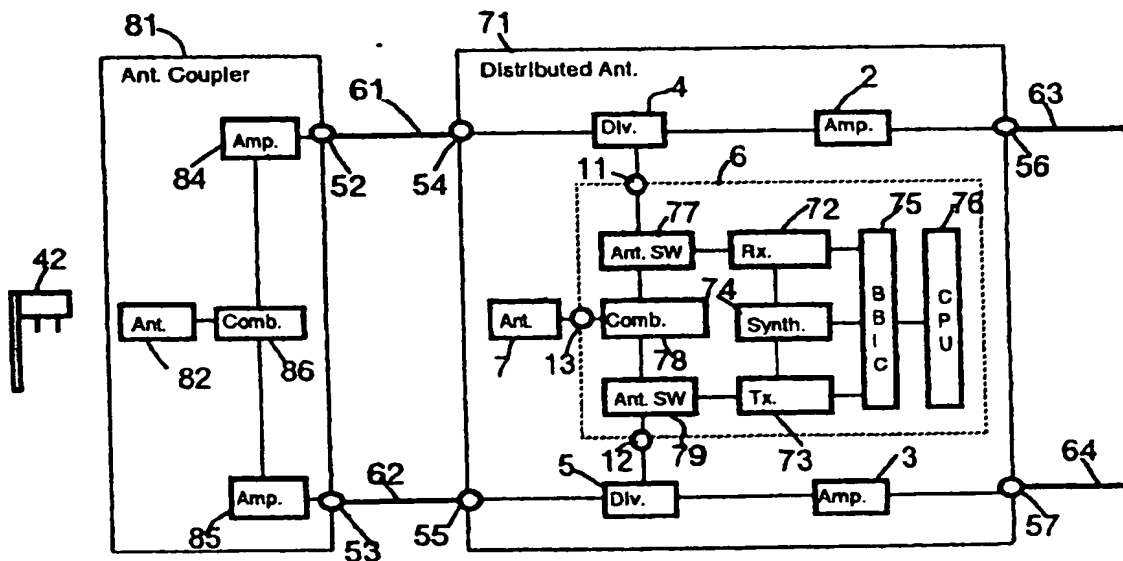


FIG. 4

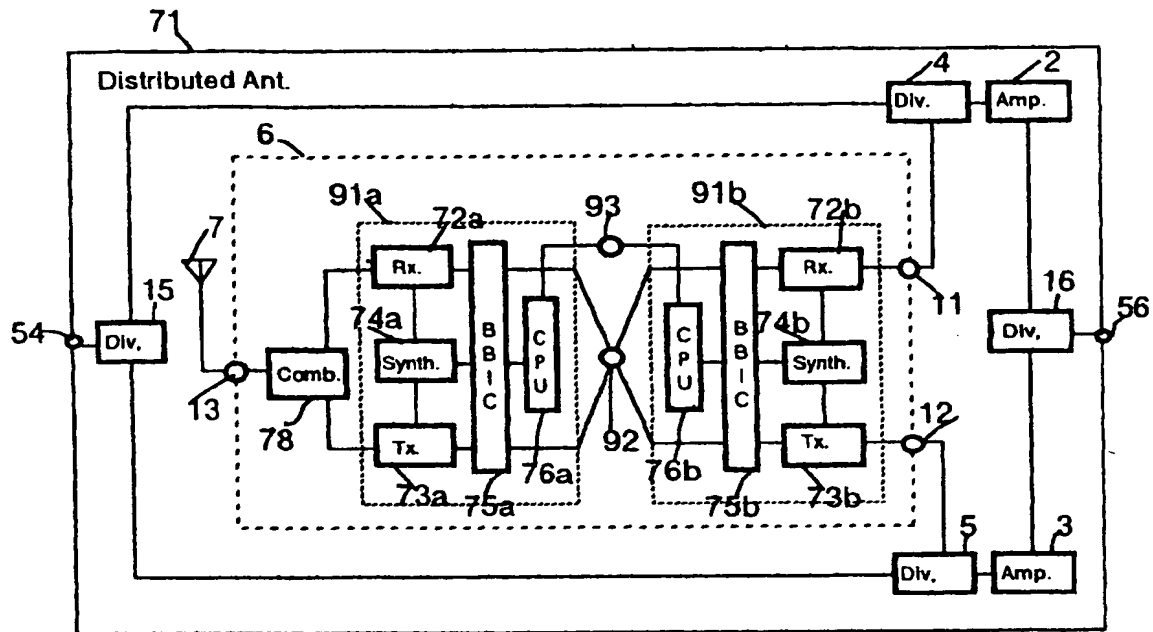


FIG. 5

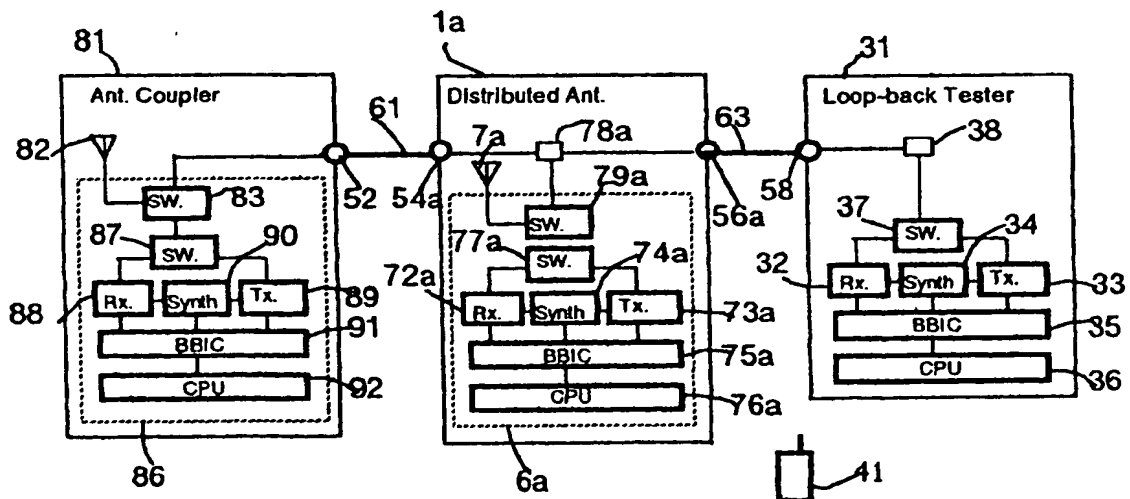


FIG. 6

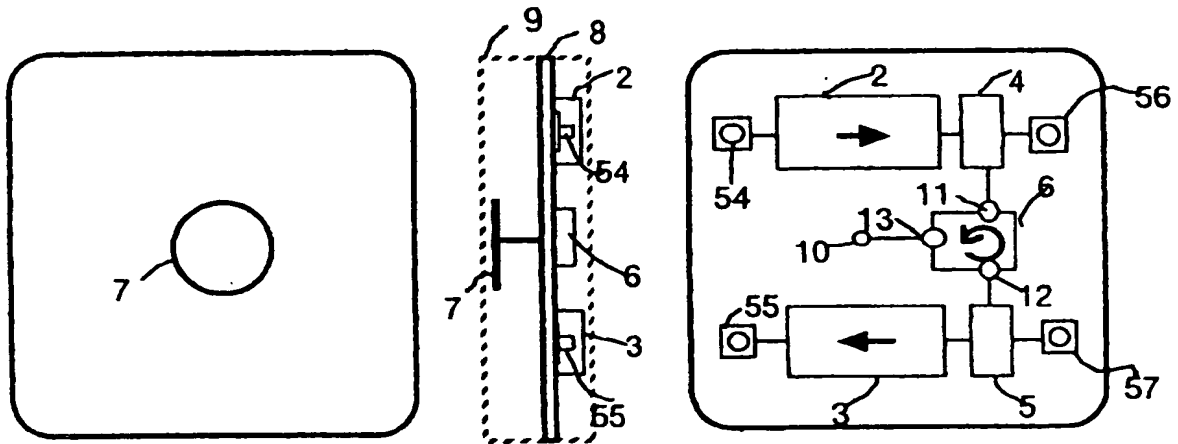


FIG. 7

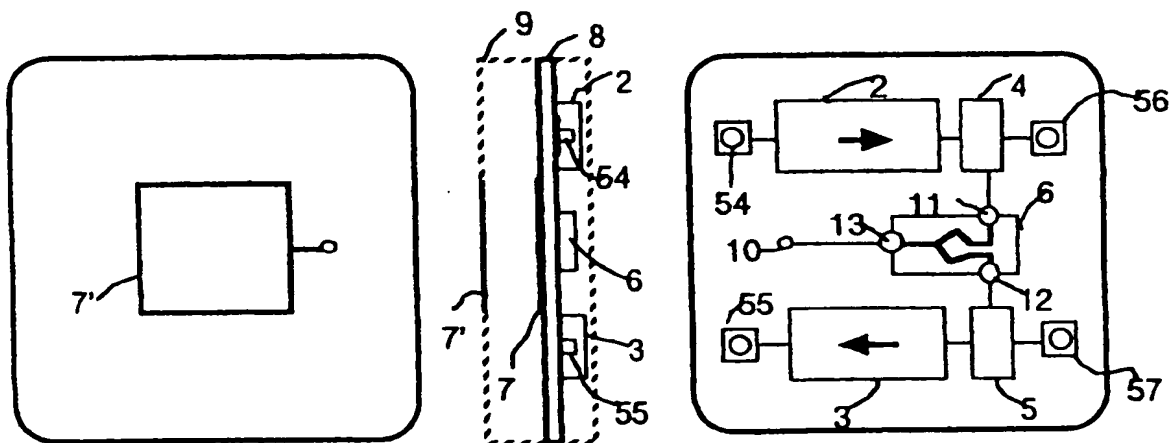


FIG. 8

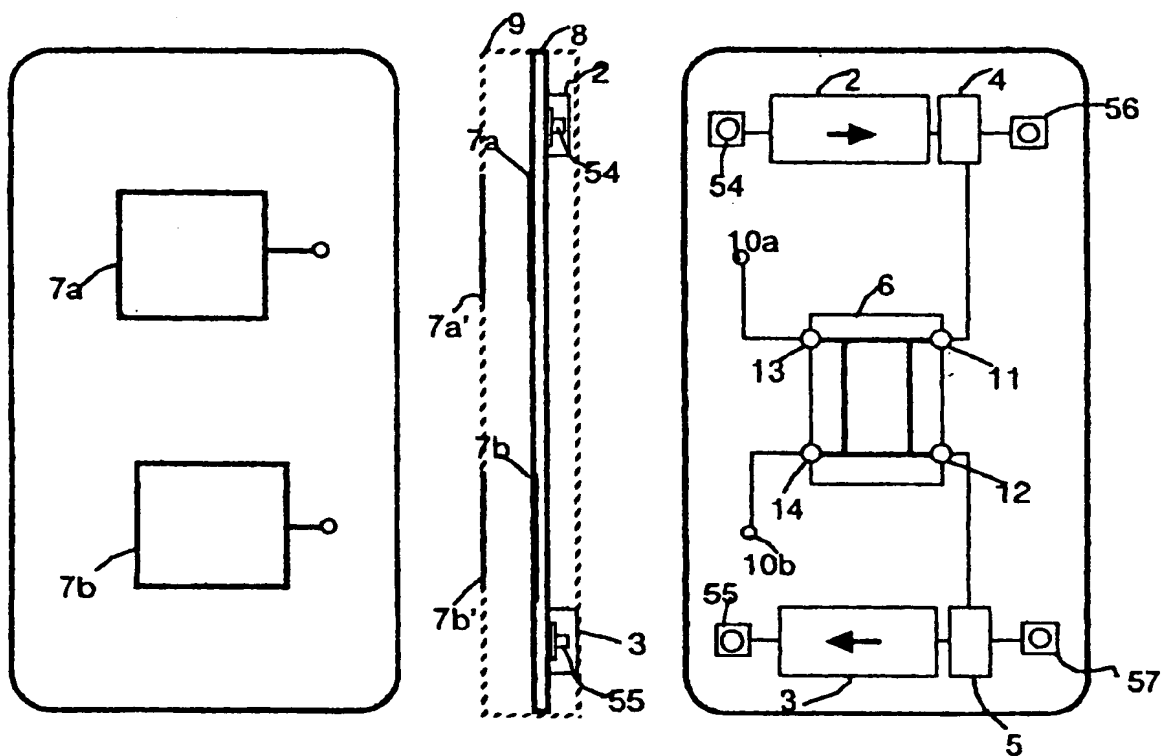


FIG. 9


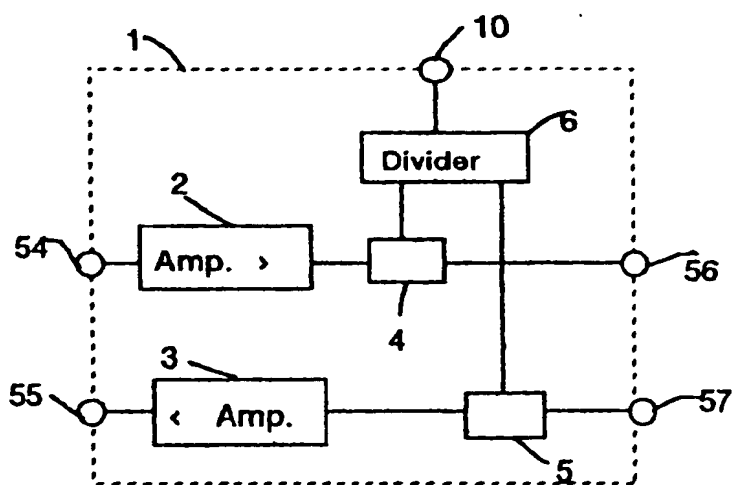


FIG. 10



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 884 863 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
19.07.2000 Bulletin 2000/29

(51) Int. Cl.<sup>7</sup>: H04B 7/26, H04Q 7/30

(43) Date of publication A2:  
16.12.1998 Bulletin 1998/51

(21) Application number: 98201966.3

(22) Date of filing: 12.06.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(71) Applicant:  
Radio Communication Systems Limited  
Amagasaki-shi, Hyogo 661-0035 (JP)

(72) Inventor: Niki, Yoshiro  
Nagoya-shi, Aichi 464-0021 (JP)

(30) Priority: 12.06.1997 JP 19175597  
08.07.1997 JP 21890097  
25.11.1997 JP 36304197  
25.02.1998 JP 8788398  
14.03.1998 JP 10688998

(74) Representative:  
Gee, Steven William  
1 South Lynn Gardens,  
London Road  
Shipston on Stour, Warwickshire CV36 4ER  
(GB)

(54) Distributed antenna for personal communication system

(57) A Distributed Antenna for use in a Digital Mobile Telephone system includes a coaxial cable or cables to communicate RF signals to and from a base station in which at least one set of transmitter and receiver is transmitting and receiving said RF signals, two mutually isolated amplifiers, two dividers, at least one combiner, and at least one built-in antenna to communicate with a subscriber unit(s). A printed circuit board is provided to assemble said built-in antenna on one side of said printed circuit board, and to assemble other electronic circuits on the other side of said printed

circuit board, and said printed circuit board is housed in a plastic case. Said distributed antenna provides a small sized and very cheap antenna solution to spread RF signals to serve a wider serving area. Moreover, if at least a set of transmitter and receiver is included in said combiner to communicate said RF signals between said base station and said subscriber units, tremendously higher gain and conversions in the control protocol and/or RF frequencies can be realized.

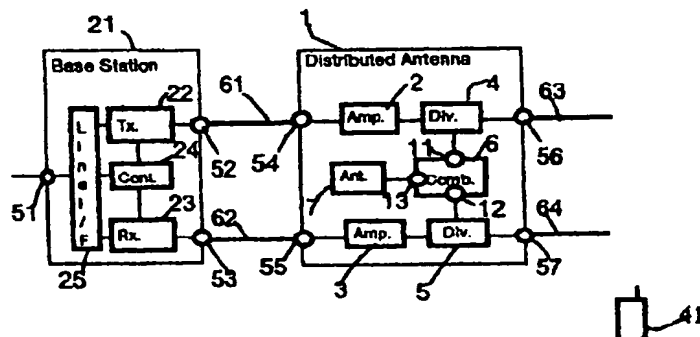


FIG. 1

EP 0 884 863 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 20 1966

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 605 182 A (NIKI YOSHIRO) 6 July 1994 (1994-07-06) * page 6, line 9 - line 33 * * page 7, line 5 - line 6 * * figures 11,13 * ---	1,2,5,7	H04B7/26 H04Q7/30
A	GB 2 301 712 A (DSC COMMUNICATIONS) 11 December 1996 (1996-12-11) * abstract * * figures 10,11 * * page 1, line 15 - line 20 * * page 2, line 6 - line 10 * * page 2, line 28 - line 2 * * page 3, line 28 - page 4, line 5 * * page 9, line 14 - line 28 * ---		
A	EP 0 522 538 A (NIPPON ELECTRIC CO) 13 January 1993 (1993-01-13) * column 1, line 41 - column 2, line 19 * ---		
A	FR 2 710 195 A (THOMSON CSF) 24 March 1995 (1995-03-24) * abstract; figure 2 * -----		
<p>-----</p> <p>The present search report has been drawn up for all claims</p>			<p>TECHNICAL FIELDS SEARCHED (Int.Cl.6)</p> <p>H01Q H04Q H04B</p>
Place of search		Date of completion of the search	Examiner
BERLIN		25 February 2000	Kampouris, A
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)





European Patent  
Office

Application Number

EP 98 20 1966

### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet 8

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☒ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:

1, 2, 5, 7



European Patent  
Office

**LACK OF UNITY OF INVENTION  
SHEET B**

Application Number  
EP 98 20 1966

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claim : 1 2 5 7

A distributed antenna network

2. Claim : 3 4 6

A receiver-transmitter combination

3. Claim : 8

A loop-back tester

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 20 1966

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-02-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0605182 A	06-07-1994	JP 7111501 A	25-04-1995
		JP 8097763 A	12-04-1996
		JP 8107383 A	23-04-1996
		JP 8265243 A	11-10-1996
		JP 6216822 A	05-08-1994
		AU 672054 B	19-09-1996
		AU 5245493 A	14-07-1994
		CA 2112342 A	01-07-1994
		SG 48863 A	18-05-1998
		US 5812933 A	22-09-1998
		JP 8079151 A	22-03-1996
GB 2301712 A	11-12-1996	AU 6761196 A	18-12-1996
		BR 9608653 A	18-05-1999
		CN 1192826 A	09-09-1998
		GB 2337861 A,B	01-12-1999
		WO 9638878 A	05-12-1996
		US 5828339 A	27-10-1998
		ZA 9604145 A	03-09-1996
EP 0522538 A	13-01-1993	JP 2887956 B	10-05-1999
		JP 5022184 A	29-01-1993
		AU 654017 B	20-10-1994
		AU 1960392 A	14-01-1993
		CA 2070894 A,C	12-01-1993
		DE 69222366 D	30-10-1997
		DE 69222366 T	09-04-1998
		US 5392461 A	21-02-1995
FR 2710195 A	24-03-1995	NONE	

EPO FORM P0456

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

